




MYC-CZU3EG/4EV/5EV-V2 System-On-Module Overview





- ✓ *Xilinx Zynq UltraScale+ ZU3EG/4EV/5EV MPSoC based on 1.2GHz Quad Arm Cortex-A53 (up to 1.5GHz) and 600MHz Dual Cortex-R5 Cores*
- ✓ *4GB DDR4 SDRAM (64bit, 2400MHz)*
- ✓ *4GB eMMC Flash, 128MB QSPI Flash*
- ✓ *On-board Gigabit Ethernet PHY, USB PHY, Power Module and Clock Generator*
- ✓ *Two 0.5mm pitch 160-pin Samtec High-Speed Headers for Board-to-Board Connections*
- ✓ *Ready-to-Run PetaLinux 2020.1*
- ✓ *Supports Xilinx Vitis Software Development Platform*

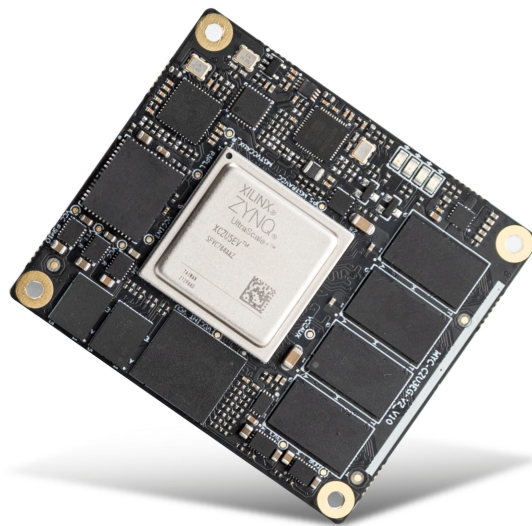

The **MYC-CZU3EG/4EV/5EV-V2 SOM** is a powerful MPSoC System-on-Module (SoM) based on Xilinx Zynq UltraScale+ ZU3EG / ZU4EV/ZU5EV which features a 1.2 GHz quad-core ARM Cortex-A53 64-bit application processor, a 600MHz dual-core real-time ARM Cortex-R5 processor, a Mali400 MP2 embedded GPU and rich FPGA fabric. It has 4GB DDR4, 4GB eMMC and 128MB QSPI Flash default memory configuration on board as well as integrated Ethernet PHY, USB PHY and Power Module to provide control and processing capabilities as a minimum embedded system. It offers easy access to signals carried to or from the MPSoC through two 0.5mm pitch 160-pin Razor Beam High-Speed Sockets. It is ready to run **PetaLinux 2020.1** and support Xilinx **Vitis** Software development platform, which comes with detailed documentations and software package.

Developers can simply design their own base board using the **MYC-CZU3EG/4EV/5EV-V2** as the embedded controller which can help save time and reduce cost. MYIR has a reference base board design for customer evaluation and prototype. The whole development board **MYD-CZU3EG/4EV/5EV-V2** takes full features of the Zynq UltraScale+ XCZU3EG-1SFVC784E/XCZU4EV-1SFVC784I/XCZU5EV-2SFVC784I MPSoC to have explored a robust set of peripherals for a wide variety of applications including the Internet, cloud computing, Data center, Machine Vision, Military facilities, Flight navigation and other embedded applications.

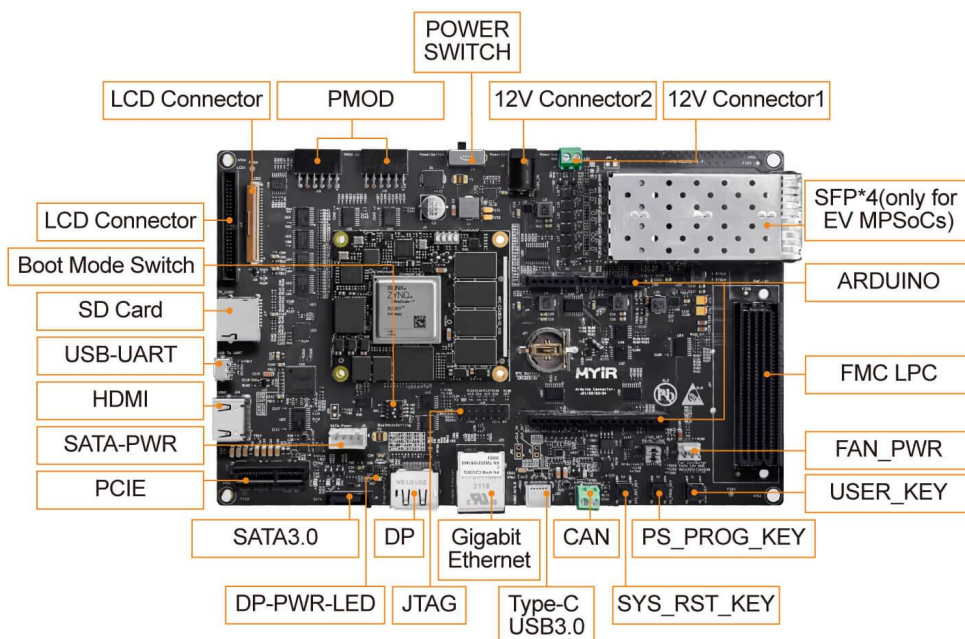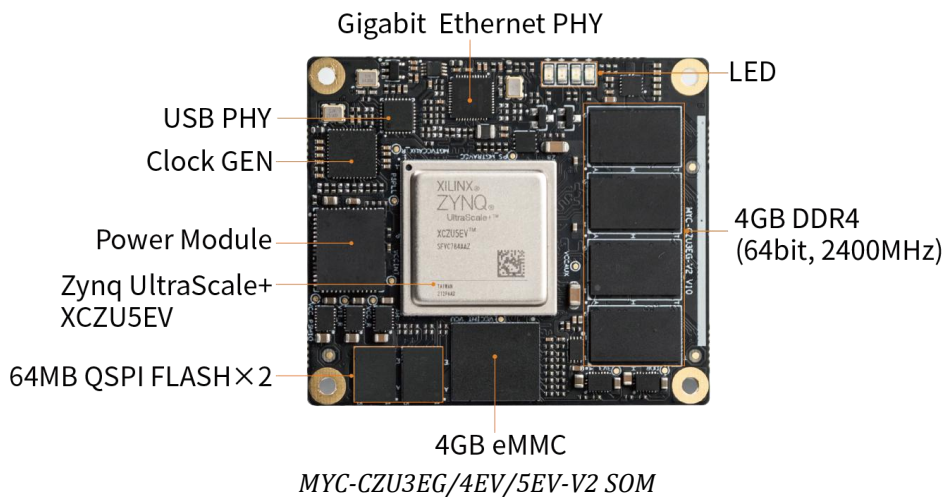



Hardware Specification

Zynq® UltraScale+™ MPSoC devices provide 64-bit processor scalability while combining real-time control with soft and hard engines for graphics, video, waveform, and packet processing. Built on a common real-time processor and programmable logic equipped platform, three distinct variants include dual application processor (CG) devices, quad application processor and GPU (EG) devices, and video codec (EV) devices.

| | CG Devices | EG Devices | EV Devices |
|-----------------------|---|---|--|
| Application Processor | Dual-core ARM® Cortex™-A53 MPCore™ up to 1.3GHz | Quad-core ARM Cortex-A53 MPCore up to 1.5GHz | Quad-core ARM Cortex-A53 MPCore up to 1.5GHz |
| Real-Time Processor | Dual-core ARM Cortex-R5 MPCore up to 533MHz | Dual-core ARM Cortex-R5 MPCore up to 600MHz | Dual-core ARM Cortex-R5 MPCore up to 600MHz |
| Graphics Processor | | Mali™-400 MP2 | Mali™-400 MP2 |
| Video Codec | | | H.264 / H.265 |
| Programmable Logic | 103K–600K System Logic Cells | 103K–1143K System Logic Cells | 192K–504K System Logic Cells |
| Applications | <ul style="list-style-type: none"> • Sensor Processing & Fusion • Motor Control • Low-cost Ultrasound • Traffic Engineering | <ul style="list-style-type: none"> • Flight Navigation • Missile & Munitions • Military Construction • Secure Solutions • Networking • Cloud Computing Security • Data Center • Machine Vision • Medical Endoscopy | <ul style="list-style-type: none"> • Situational Awareness • Surveillance/Reconnaissance • Smart Vision • Image Manipulation • Graphic Overlay • Human Machine Interface • Automotive ADAS • Video Processing • Interactive Display |

Figure 1-4 Zynq UltraScale+ MPSoCs

The Zynq UltraScale+ family provides footprint compatibility to enable users to migrate designs from one device to another. Any two packages with the same footprint identifier code (last letter and number sequence) are footprint compatible. MYIR is using the **XCZU3EG-1SFVC784E** / **XCZU4EV-1SFVC784I** / **XCZU5EV-2SFVC784I** MPSoC by default, the C784 package covers the widest footprint compatibilities that enable users to select devices among CG, EG and EV.

| Pkg | mm | Zynq® UltraScale+™ | | | | | | | | | | | | | | | | | | | | |
|-------|------|--------------------|-------|-------|-------|-------|-------|-------|------------|-------|-------|-------|-------|-------|-------|------------|--------|--------|--------|-------|-------|-------|
| | | CG Devices | | | | | | | EG Devices | | | | | | | EV Devices | | | | | | |
| | | ZU2CG | ZU3CG | ZU4CG | ZU5CG | ZU6CG | ZU7CG | ZU9CG | ZU2EG | ZU3EG | ZU4EG | ZU5EG | ZU6EG | ZU7EG | ZU9EG | ZU11EG | ZU15EG | ZU17EG | ZU19EG | ZU4EV | ZU5EV | ZU7EV |
| A484 | 19 | ■ | ■ | | | | | | ■ | ■ | | | | | | | | | | | | |
| A625 | 21 | ■ | ■ | | | | | | ■ | ■ | | | | | | | | | | | | |
| C784 | 23 | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| B900 | 31 | | ■ | ■ | ■ | ■ | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| C900 | 31 | | | ■ | ■ | ■ | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| B1156 | 35 | | | | ■ | ■ | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| C1156 | 35 | | | | | ■ | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| B1517 | 40 | | | | | | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| F1517 | 40 | | | | | | | ■ | | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| C1760 | 42.5 | | | | | | | | | | | | | | | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| D1760 | 42.5 | | | | | | | | | | | | | | | | ■ | ■ | ■ | ■ | ■ | ■ |
| E1924 | 45 | | | | | | | | | | | | | | | | | ■ | ■ | ■ | ■ | ■ |

Zynq® UltraScale+™ MPSoC Device Migration Table



MYIR supplies the MYC-CZU3EG/4EV/5EV-V2 SOMs with XCZU3EG, XCZU4EV or XCZU5EV MPSoC as options. The main features for the MPSoC devices are summarized as below.

| Device | XCZU2CG | XCZU3CG | XCZU3EG | XCZU4EV | XCZU5EV |
|--|--|---------------------|---|---------------------------------------|---------------------------------------|
| Logic cells (k) | 103 | 154 | 154 | 192 | 256 |
| CLB Flip-Flops (K) | 94 | 141 | 141 | 176 | 234 |
| CLB LUTs (K) | 47 | 71 | 71 | 88 | 117 |
| Block RAM (Mb) | 5.3 | 7.6 | 7.6 | 4.5 | 5.1 |
| UltraRAM (Mb) | - | - | - | 13.5 | 18.0 |
| DSP Slices | 240 | 360 | 360 | 728 | 1,248 |
| GTX transceivers | PS-GTR4x (6Gb/s) | PS-GTR4x (6Gb/s) | PS-GTR4x (6Gb/s) | PS-GTR4x (6Gb/s), GTH4x (16.3Gb/s) | PS-GTR4x (6Gb/s), GTH4x (16.3Gb/s) |
| Processor Units | | | | | |
| Application Processor Unit | Dual-core ARM® Cortex™-A53 MPCore™ up to 1.3GHz | | Quad-core ARM® Cortex™-A53 MPCore™ up to 1.5GHz | | |
| Memory w/ECC | L1 Cache 32KB I / D per core, L2 Cache 1MB, on-chip Memory 256KB | | | | |
| Real-Time Processor Unit | Dual-core ARM Cortex-R5 MPCore™ up to 600MHz | | | | |
| Memory w/ECC | L1 Cache 32KB I / D per core, Tightly Coupled Memory 128KB per core | | | | |
| Graphics Processing Unit | - | - | Mali™-400 MP2 up to 667MHz | | |
| Video Codec | - | - | - | H.264 / H.265 | |
| Memory L2 Cache | 64KB | | | | |
| External Memory, Connectivity, Integrated Block Functionality | | | | | |
| Dynamic Memory Interface | x32/x64: DDR4, LPDDR4, DDR3, DDR3L, LPDDR3 with ECC | | | | |
| Static Memory Interfaces | NAND, 2x Quad-SPI | | | | |
| High-Speed Connectivity | PCIe® Gen2 x4, 2x USB3.0, SATA 3.1, DisplayPort, 4x Tri-mode Gigabit Ethernet | | | | |
| General Connectivity | 2 x USB 2.0, 2 x SD/SDIO, 2 x UART, 2 x CAN 2.0B, 2 x I2C, 2 x SPI, 4 x 32b GPIO | | | | |
| Power Management | Full / Low / PL / Battery Power Domains | | | | |
| Security | RSA, AES, and SHA | | | | |
| AMS - System Monitor | 10-bit, 1MSPS – Temperature and Voltage Monitor | | | | |


MPSoC device selection guide



The MYC-CZU3EG/4EV/5EV-V2 SOM takes full features of the Xilinx Zynq UltraScale+ ZU3EG/4EV/5EV MPSoC to bring out most of the processor signals through two 0.5mm pitch 160-pin Razor Beam High-Speed headers. The main features are characterized as below:



MYC-CZU3EG/4EV/5EV-V2 Top-view

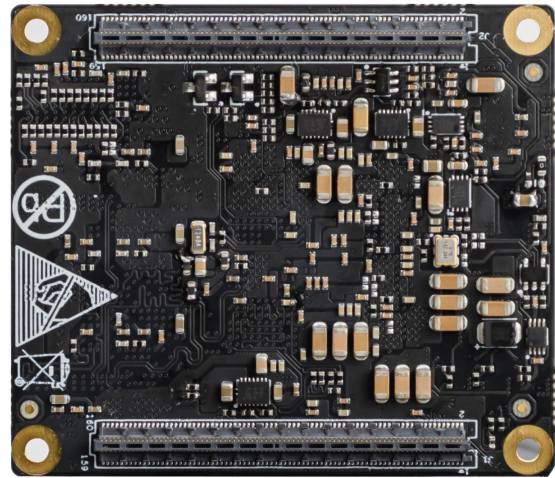

MYC-CZU3EG/4EV/5EV-V2 Bottom-view

Mechanical Parameters

- Dimensions: 60.00 mm x 52.00 mm
- PCB Layers: 12-layer design
- Power supply: 3.3V
- Working temp.: 0~70 Celsius (commercial grade, MYC-CZU3EG-V2),
-40~85 Celsius (industrial grade, MYC-CZU4EV/5EV-V2)

MPSoC

- Xilinx Zynq UltraScale+ XCZU3EG-1SFVC784E / XCZU4EV-1SFVC784I/ XCZU5EV-2SFVC784I MPSoC
 - 1.2GHz 64 bit Quad-core ARM® Cortex™-A53
 - 600MHz Dual-core ARM® Cortex™-R5 processor
 - ARM Mali™-400MP2 Graphics Processor
 - 16nm FinFET+ FPGA fabric

Memory

- 4GB DDR4 SDRAM (64bit, 2400MHz)
- 4GB eMMC Flash
- 128MB QSPI Flash


Peripherals and Signals Routed to Pins

- Gigabit Ethernet PHY
- USB PHY
- Power Module
- Clock Generator
- Watchdog
- Four LEDs
 - One yellow LED for ERROR_STATUS indicator (indicate a secure lockdown state)
 - One yellow LED for ERROR_OUT indicator (Asserted for accidental power loss, hardware error)
 - One green LED for PS_Done indicator (indicate the pl configuration is done)
 - One green LED for PS_INIT indicator (indicate the ps is initialized after a power-on reset)




- Two 0.5mm pitch 160-pin Razor Beam High-Speed headers bring out
 - 4 PS GTR transceivers along with 2 GTR reference clock inputs
 - PS JTAG interface, USB 2.0 interface, Gigabit Ethernet interface and etc.
 - 4 PL GTH transceivers along with 1 GTH reference clock input (only for Zynq UltraScale+ EV Devices)
 - 156 user PL I/O pins

Function Block Diagram

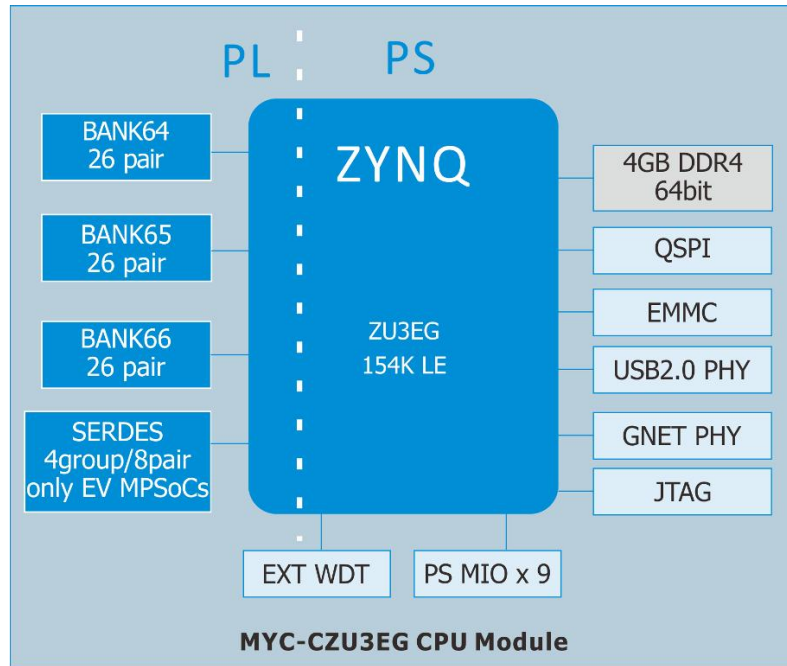

Function Block Diagram of MYC-CZU3EG/4EV/5EV-V2

Dimension Chart

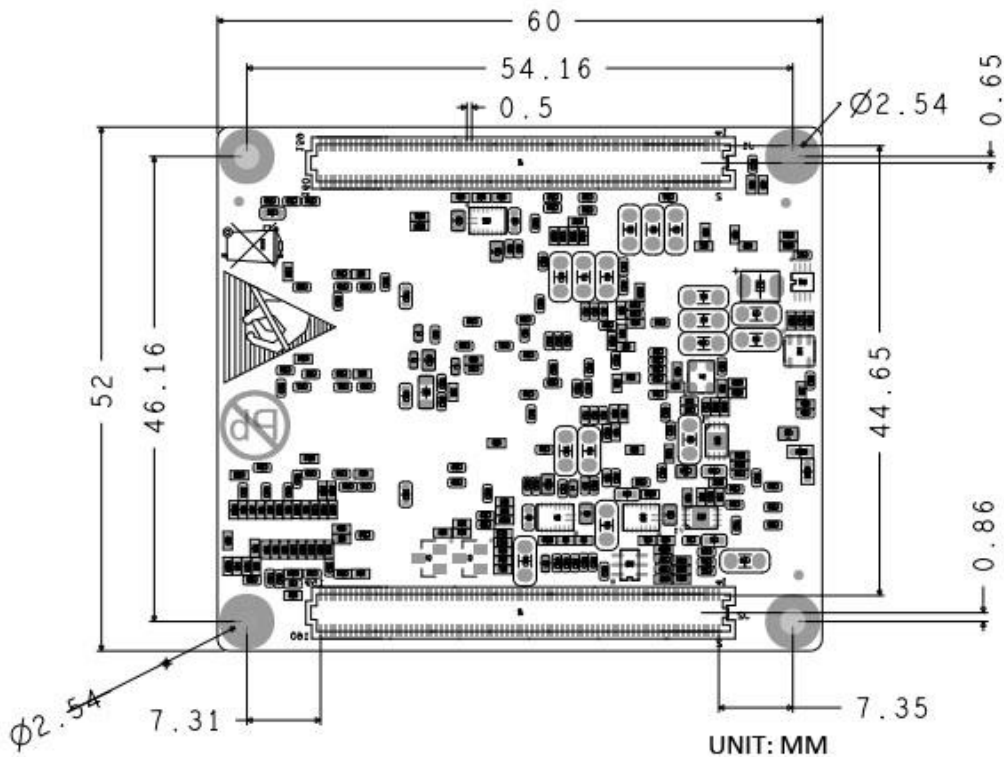

Dimension Chart of MYC-CZU3EG/4EV/5EV-V2 (Top-view)



Software Features


The MYC-CZU3EG/4EV/5EV-V2 SOM is preloaded with PetaLinux 2020.1. MYIR provides software package in product disk along with the goods delivery. The software package features as below:

| Item | Features | Description | Remark |
|----------------|---|---|----------------------|
| Cross compiler | gcc9.2.0 | gcc version 9.2.0 | |
| | gcc 5.2.1 | gcc version 5.2.1 (Linaro GCC5.2) | |
| Boot program | BOOT.BIN | First boot program including FSBL, u-boot2020.01 | Source code provided |
| Linux Kernel | Linux 5.4.0 | Customized kernel for MYD-CZU3EG/4EV/5EV-V2 Board | Source code provided |
| Drivers | SFP & SFP+ | SFP driver and SFP+ driver (only for CZU4EV/5EV-V2) | Source code provided |
| | USB Host | USB2.0/USB3.0 Host driver | Source code provided |
| | Ethernet | Gigabit Ethernet driver | Source code provided |
| | MMC/SD/TF | MMC/SD/TF card driver | Source code provided |
| | QSPI Flash | QSPI Flash driver | Source code provided |
| | PCI-E | PCI-E driver | Source code provided |
| | CAN | CAN driver | Source code provided |
| | DP | DP display driver | Source code provided |
| | HDMI | HDMI display driver | Source code provided |
| | LCD | LCD display driver | Source code provided |
| | Button | Button driver | Source code provided |
| | UART | Uart rs232 driver | Source code provided |
| | I2C | I2C driver | Source code provided |
| | LED | LED driver | Source code provided |
| | GPIO | GPIO driver | Source code provided |
| | QSPI | QSPI Flash MT25QU512ABB driver | Source code provided |
| | Touch Screen | TSC2007 resistive touch screen driver | Source code provided |
| | | FT5X0X capacitive touch screen driver | Source code provided |
| SATA | SATA HD driver | Source code provided | |
| Watch dog | Watch dog driver | Source code provided | |
| Example | Including Button, LED, CAN, Socket examples | | |
| File System | Ramdisk | Ramdisk system image | File System |
| | Rootfs.tar | Buildroot, including QT | Source code provided |
| Petalinux | Petalinux2020.1 | Supports Xilinx development tools for PetaLinux 2020.1 and provides complete customized Linux BSP in source code including kernel, uboot, filesystem, etc. Supports Xilinx Vitis development. | |

Software Features of MYC-CZU3EG/4EV/5EV-V2



Order Information

| Item | Packing List |
|---|--|
| MYC-CZU3EG-V2 SOM (Part No.: MYC-CZU3EG-V2-4E4D-1200-C) | ✓ MYC-CZU3EG-V2 SOM |
| MYC-CZU4EV-V2 SOM (Part No.: MYC-CZU4EV-V2-4E4D-1200-I-FAN) | ✓ MYC-CZU4EV-V2 SOM (installed with heatsink) |
| MYC-CZU5EV-V2 SOM (Part No.: MYC-CZU5EV-V2-4E4D-1200-I-FAN) | ✓ MYC-CZU5EV-V2 SOM (installed with heatsink) |
| MYD-CZU3EG-V2 Development Board (Part No.: MYD-CZU3EG-V2-4E4D-1200-C) | ✓ One MYD-CZU3EG/4EV/5EV-V2 Development Board (including the base board and SOM with installed active heatsink) ✓ One HDMI cable ✓ One 12V/5A Power adapter ✓ One 1.2m Mini USB2.0 cable ✓ One USB A3.0 to Type-C cable Adapter ✓ One 16GB TF card |
| MYD-CZU4EV-V2 Development Board (Part No.: MYD-CZU4EV-V2-4E4D-1200-C) | |
| MYD-CZU5EV-V2 Development Board (Part No.: MYD-CZU5EV-V2-4E4D-1200-C) | |
| MY-TFT070RV2 LCD Module (Part No.: MY-TFT070RV2) | 7-inch LCD Module with resistive touch screen |
| MY-TFT070CV2 LCD Module (Part No.: MY-TFT070CV2) | 7-inch LCD Module with capacitive touch screen |
| MY-CAM002U Camera Module (Part No.: MY-CAM002U) | USB Camera Module |
| MYC-CZU3EG-V2-Radiator Active heatsink (Part No.: MY-COOLER004-3EG-V2) |  |



MYIR Electronics Limited

Headquarter Address: Room 04, 6th Floor, Building No.2, Fada Road, Yunli Smart Park, Bantian, Longgang District, Shenzhen, Guangdong, China 518129

Factory Address: Room 201, Block C, Shengjianli Industrial Park, Dafu Industrial Zone, Guanlan, Longhua District, Shenzhen, 518110, China

Website: en.myir.cn

Email: sales@myir.cn

Tel: +86-755-22984836