




# MYD-LT527-SX Quick Start Guide


## 1. Hardware Interface & Points to note

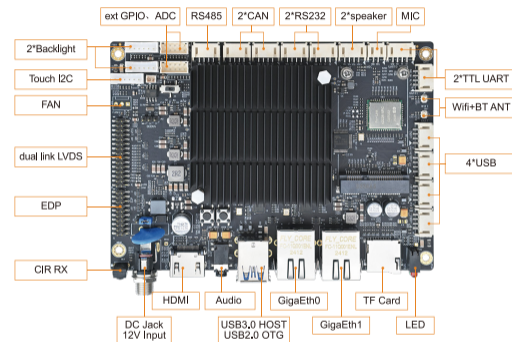

MYD-LT527-SX Top-view

### Points to note:

- 1.The factory image program has been burned into the eMMC of the core board at the factory. You only need to follow steps to start the board.
- 2.Please use a standard 12V3A power adapter to avoid damaging the board.

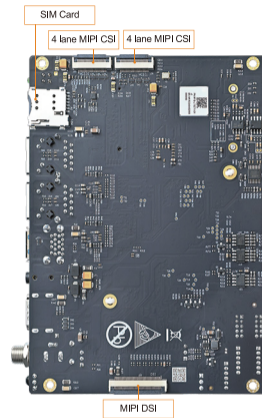

MYD-LT527-SX Bottom-view

## 2. Operating instructions

### Step 1: Connect the HDMI monitor

Default mirror for HDMI display(1080P)



### Step 2: Connect USB mouse and keyboard

When using the USB port above J2, pay attention to switch to HOST mode



### Step 3: Connect the Power Jack

A power plug is provided with the board. Please prepare an appropriate 12VDC power adapter. Insert the power plug into the power Jack (J1) of the development board. Then DIY to properly connect your power adapter with the power plug before use.



Power Jack



Power Plug



Positive terminal of the Plug +

Negative terminal of the Plug -

### Step 4: Android interface operation

You can use the mouse and keyboard to operate after the system starts up and enters the Android interface.

